



350トン吊りトラッククレーン

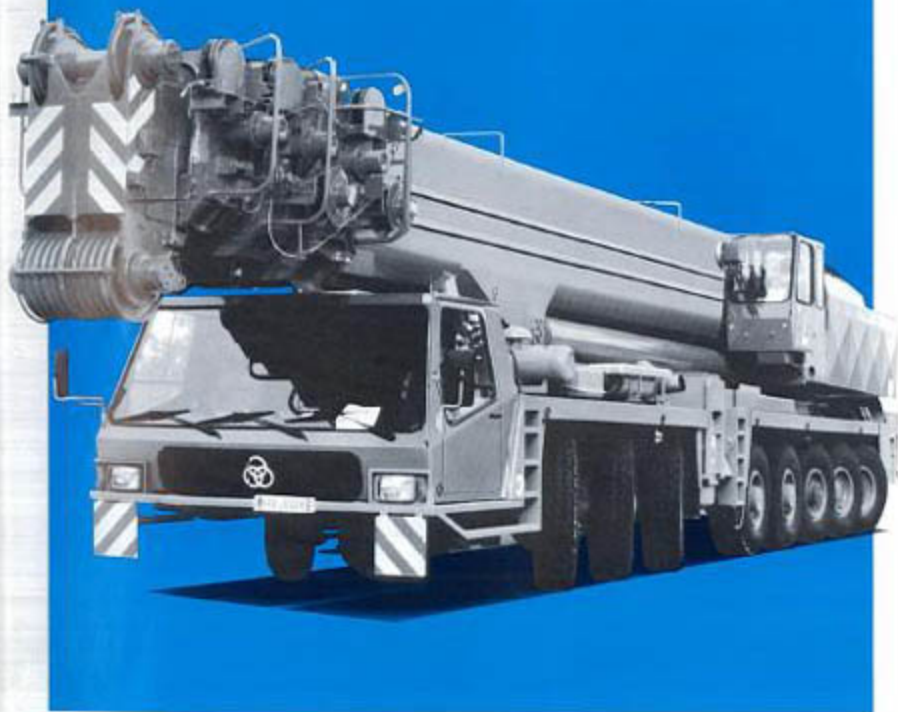

TADANO

[illegible]

作業半径揚程図

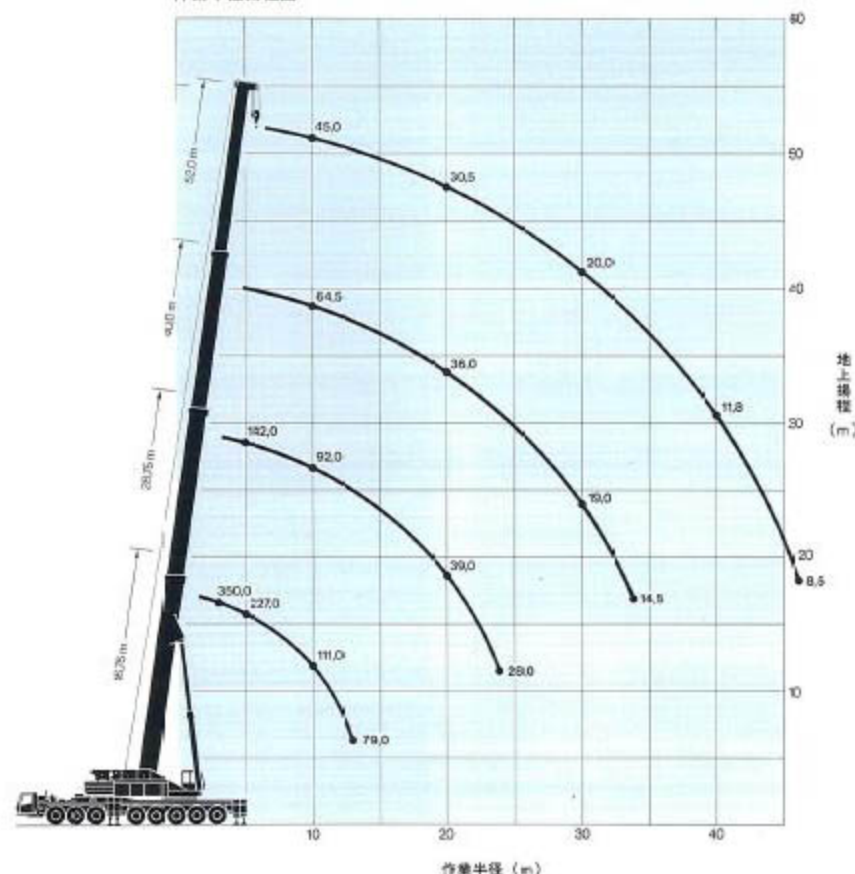

フック容量	5	130	80	30
掛数	本	12	8	4

※350k及び240kフックはオプションです。

定格総荷重表


単位(t)

作業半径 [m]	ブーム長さ [m]															
	45.75				28.75				40.0				52.0			
	最大地上揚程 (m)															
	80.0				29.0				40.0				52.0			
	カウンタウエイト (t)															
	60*	93**	90	20	60	50	94	30	60	30	95	30				
3	350.0	315.0	300.0	288.0	243.0	232.0										
3.5	310.0	280.0	270.0	266.0	224.0	215.0										
4	279.0	260.0	255.0	246.0	207.0	198.0										
4.5	251.0	248.0	238.0	223.0	183.0	185.0	194.0	190.0								
5	227.0	227.0	221.0	204.0	161.0	173.0	147.0	142.0								
6	190.0	190.0	190.0	186.0	159.0	152.0	124.0	128.0								
7	163.0	163.0	163.0	142.0	143.0	134.0	117.0	117.0	89.0	80.0						
8	143.0	143.0	143.0	110.0	126.0	113.0	104.0	108.0	74.5	74.5						
9	125.0	125.0	125.0	87.0	117.0	109.0	94.0	97.0	69.0	69.0	45.0	45.0				
10	111.0	111.0	109.0	71.0	104.0	98.0	81.0	85.0	64.5	64.5	45.0	45.0				
11	99.0	99.0	92.0	50.0	94.0	77.0	61.0	75.0	69.0	69.0	44.5	44.5				
12	89.0	89.0	79.0	30.0	84.0	67.0	64.0	64.0	59.0	59.0	43.0	43.0				
13	79.0	79.0	69.0	43.0	76.0	59.0	71.0	56.0	52.5	52.5	41.0	41.0				
14							67.0	48.0	49.5	48.4	39.0	39.0				
15							61.0	42.0	46.5	42.0	37.5	37.5				
16							54.0	37.0	44.0	37.5	36.0	36.0				
18							47.0	29.0	38.5	30.0	32.0	32.0				
20							34.0	23.0	36.0	24.3	30.5	26.4				
22							34.0	18.6	32.5	20.0	28.0	22.0				
24							21.0	15.0	28.0	16.5	25.5	18.6				
25									25.0	13.6	23.5	15.8				
28									22.0	11.2	21.5	13.5				
30									18.0	8.3	20.0	11.5				
32									16.6	7.8	18.5	9.8				
34									14.5	6.1	16.8	8.3				
36											14.8	7.8				
38											13.5	5.9				
40											11.8	4.9				
42											10.6					
44											8.5					
46											8.5					

注

- ① 上表の定格総荷重はアウトリガを水平位置に最大搬出した値(但し、アウトリガが中間搬出時の値で7°未満はタレんの強度に基づき、下欄はタレんの安定に基づいています)。
- ② 上表はブームの展開範囲がキャリヤ後方20°(左右各10°)以内、※※はキャリヤ後方90°(左右各45°)以内でアウトリガが中間搬出時の値を示します。
- ③ 上表の定格総荷重はつり具とフック重量を含んだ値を示します。
- ④ 上表の定格総荷重はブームの自重を含んだ状態の作業半径に基づいています。

作業半径揚程図

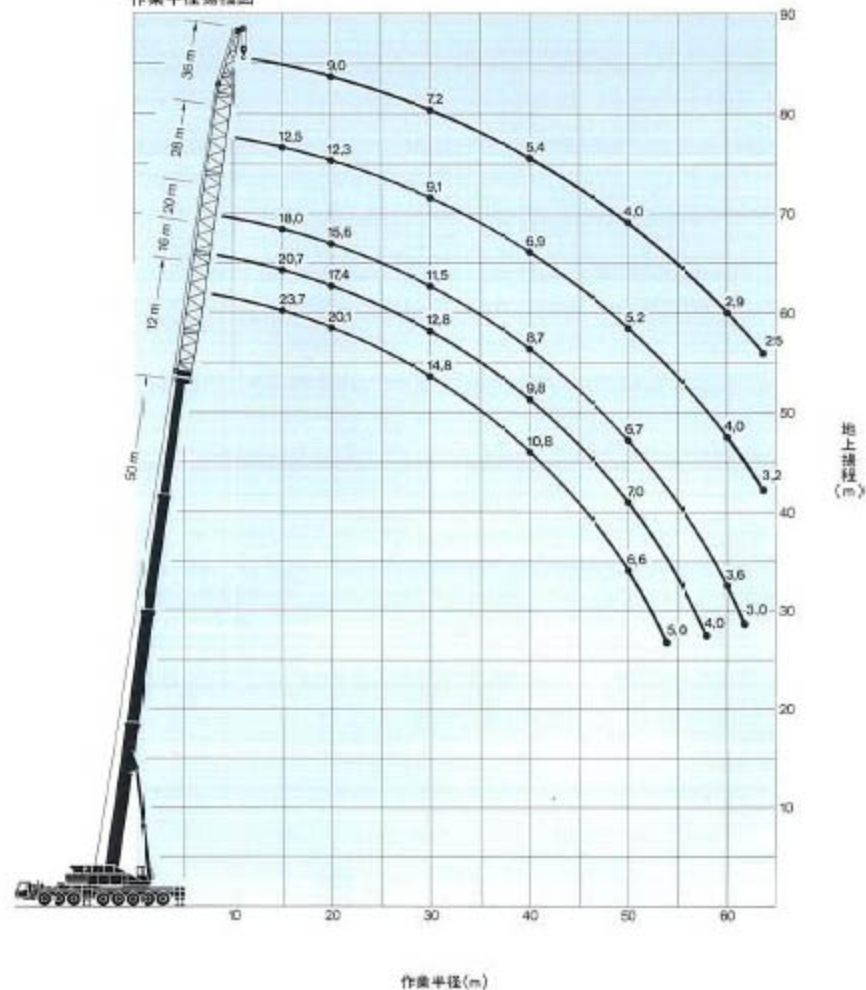


定格総荷重 (カウンタウエイト60t装着時)

単位(t)


作業半径 (m)	ジブ長さ (m)									
	55+12		50+15		50+20		50+25		50+30	
	オフセット									
	0°	20°	0°	20°	0°	20°	0°	20°	0°	20°
11	25.5									
12	25.5		25.5							
13	25.4		26.5		18.0					
14	24.3		29.4		18.0					
15	23.7		23.7		18.0		12.5			
16	23.0	18.5	22.0		17.4		12.5			
18	21.5	15.8	19.8	14.9	16.8		12.5		9.0	
20	20.1	15.1	17.4	14.2	15.6	12.5	12.3		9.0	
22	18.9	14.5	16.4	13.8	14.6	12.0	11.6		8.9	
24	17.7	13.9	15.4	13.1	13.7	11.5	11.0	8.3	8.4	
26	16.7	13.4	14.4	12.6	12.9	11.1	10.3	8.1	8.0	
28	15.7	12.9	13.6	12.2	12.1	10.6	9.7	7.8	7.5	5.8
30	14.8	12.4	12.8	11.8	11.3	10.3	9.1	7.5	7.2	5.9
32	13.9	12.0	12.3	11.0	10.8	9.9	8.6	7.1	6.9	5.3
34	13.1	11.7	11.8	10.2	10.2	9.4	8.1	6.8	6.4	5.0
36	12.3	11.3	11.0	9.9	9.7	9.0	7.7	6.5	6.1	4.7
38	11.5	11.1	10.4	9.4	9.2	8.5	7.3	6.3	5.7	4.5
40	10.8	10.8	9.8	9.1	8.7	8.2	6.9	6.0	5.4	4.3
42	10.0	10.5	9.2	8.7	8.3	7.8	6.5	5.8	5.1	4.0
44	9.3	10.3	8.7	8.3	7.9	7.4	6.1	5.6	4.8	3.8
46	8.6	9.4	8.2	7.9	7.5	7.1	5.8	5.4	4.5	3.6
48	7.9	8.3	7.6	7.3	7.1	6.7	5.5	5.2	4.2	3.5
50	6.8	7.3	7.0	7.0	6.7	6.5	5.2	4.9	4.0	3.3
52	5.7	6.4	6.2	6.0	6.3	6.3	4.9	4.5	3.7	3.1
54	5.0	5.5	5.4	5.1	5.6	5.9	4.6	4.4	3.5	2.9
56			4.8	5.2	4.9	5.7	4.4	4.2	3.3	2.8
58			4.0	4.5	4.2	5.0	4.2	4.0	3.1	2.6
60					3.6	4.3	4.0	3.8	2.9	2.4
62					3.0		3.7	3.6	2.7	2.2
64							3.2	3.4	2.5	2.0

注意

- ① 上記の定格総荷重はアウトリガを水平堅固土上に最大張出した時の値です。
 ② 上記の定格総荷重はつり具の重量とフック重量を含んだ値を示します。
 ③ 上記はブームのたわみを含んで実際の作業半径に基づいています。
 ④ ジブの構造は下記の通りです。
 ⑤ L16型ジブの場合は4m最小ジブを使用します。



作業半径揚程図

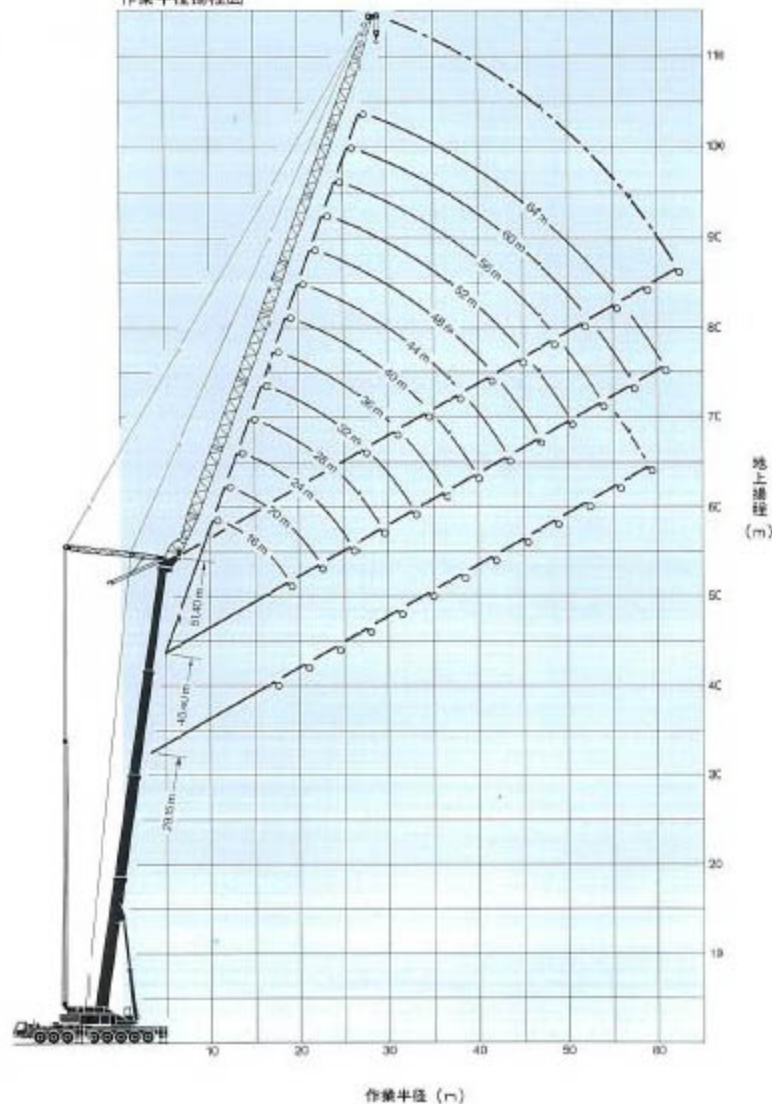

定額総荷重表 ① (カウンタウエイト60t装着時)


単位 (t)

作業半径 (m)	ブーム長さ (m)												
	27.75+1.4~29.15												
	ジブ長さ (m)												
	10	20	24	28	32	36	40	44	48	52	56	60	64
12	64.0												
14	58.4	56.0											
16	48.0	51.0	48.0	43.2									
18		42.0	45.0	43.2	37.2								
20		35.5	38.0	40.4	37.2	31.0							
22			33.0	35.0	36.8	31.0	27.1	22.0					
24			28.0	31.0	31.6	27.1	22.0	18.3					
26				27.5	28.2	23.0	19.3	16.5					
28				24.5	25.4	20.6	17.3	14.4	11.8				
30					23.2	18.8	15.3	12.2	10.0				
32						17.6	14.0	11.0	9.0				
34						15.8	12.5	10.0	8.0				
36							11.0	9.0	7.0				
38							9.5	7.5	5.5				
40								6.2	4.5	3.5			
42													
44													
46													
48													
50													
52													
54													
56													
58													
60													
62													

注意

定額総荷重表 ①について

- ①定額総荷重はアクリルガラスを水平地上に最大張出した時の値です。
- ②定額総荷重はつり具の重量とフック重量を含んだ値を示します。
- ③定額総荷重はブームのたわみを含んだ実際の作業半径に基づいています。
- ④ラフングジブの構成は下記の通りです。

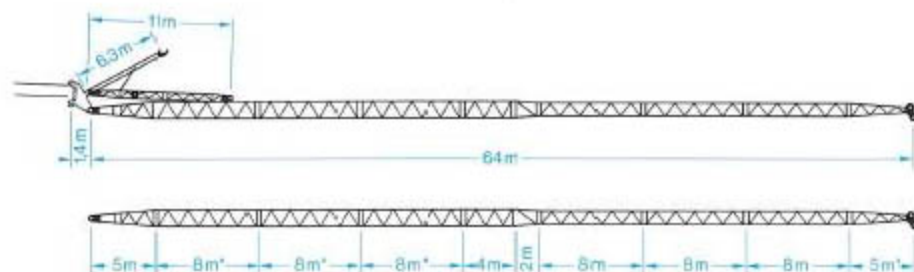

定格総荷重表 (2) (カウンタウエイト60t装着時)

単位(t)


作業 位置 (m)	ブーム長さ (m)												
	31.0 + 1.4 = 32.4												
	ジブ長さ (m)												
	16	20	24	28	32	36	40	44	48	52	56	60	64
12													
14	37.7												
16	35.7	31.1											
18	34.0	31.9	28.5										
20	33.0	30.3	28.1	24.5									
22		21.1	26.9	24.5	39.9	18.1							
24			25.8	24.1	39.9	18.1	15.7						
26			25.1	23.3	39.9	18.1	15.7	13.8					
28				22.6	39.9	18.1	15.7	13.8	11.7	10.1			
30				22.0	39.2	18.1	15.7	13.8	11.7	10.1	8.7		
32					38.8	18.1	15.7	13.8	11.7	10.1	8.7	7.3	
34					38.4	18.0	15.7	13.8	11.7	10.1	8.7	7.3	6.2
36						17.5	15.7	13.8	11.7	10.1	8.7	7.3	6.2
38							15.7	13.8	11.7	10.1	8.7	7.3	6.2
40							15.6	13.8	11.7	10.1	8.7	7.3	6.2
42								13.8	11.7	10.1	8.7	7.3	6.2
44								13.8	11.7	10.1	8.7	7.3	6.2
46								11.7	10.1	8.7	7.3	6.2	
48								11.7	10.1	8.7	7.3	6.2	
50								11.7	10.1	8.7	7.3	6.2	
52										8.7	7.3	6.2	
54										8.7	7.3	6.2	
56											7.3	6.2	
58												7.3	6.2
60													6.2
62													6.2

定格総荷重表 (3) (カウンタウエイト60t装着時)



単位(t)

作業 位置 (m)	ブーム長さ (m)												
	50.0 + 1.6 = 51.6												
	ジブ長さ (m)												
	16	20	24	28	32	36	40	44	48	52	56	60	64
12													
14													
16													
18	16.3												
20	16.3	16.3	13.8										
22	16.8	16.3	13.8	12.1									
24		16.3	13.8	12.1	10.4								
26		16.2	13.8	12.1	10.4	8.8							
28			13.8	12.1	10.4	8.8	7.3						
30				12.1	10.4	8.8	7.3	6.2	5.1				
32				12.1	10.4	8.8	7.3	6.2	5.1	4.2			
34					10.4	8.8	7.3	6.2	5.1	4.2	3.4		
36					10.4	8.8	7.3	6.2	5.1	4.2	3.4	2.8	
38						8.8	7.3	6.2	5.1	4.2	3.4	2.8	2.3
40						8.8	7.3	6.2	5.1	4.2	3.4	2.8	2.3
42							7.3	6.2	5.1	4.2	3.4	2.8	2.3
44								6.2	5.1	4.2	3.4	2.8	2.3
46								6.2	5.1	4.2	3.4	2.8	2.3
48								6.2	5.1	4.2	3.4	2.8	2.3
50									5.1	4.2	3.4	2.8	2.3
52										4.2	3.4	2.8	2.3
54										4.2	3.4	2.8	2.3
56											3.4	2.8	2.3
58												2.8	2.3
60													2.3
62													2.3

全装備寸法図

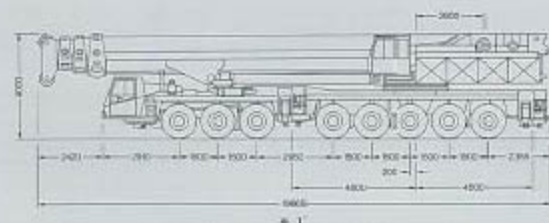

※ 計カウンタウエイト、フラス式ジブ、補強ウインチは含まれておりません。
※ 計カウンタウエイト、補強ウインチを示します。

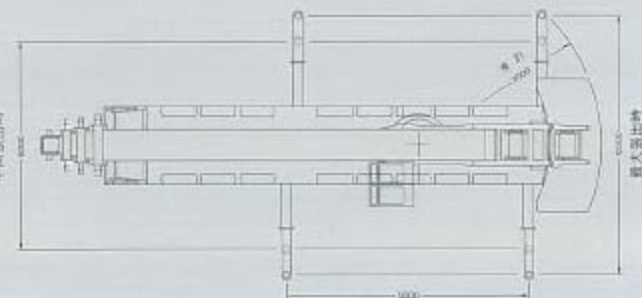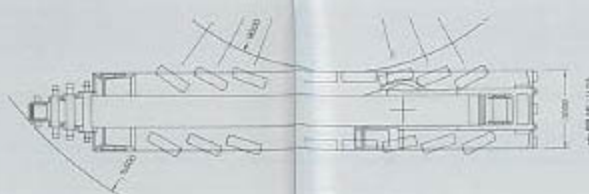

(単位:mm)